


MORTAR JOINT REPAIR

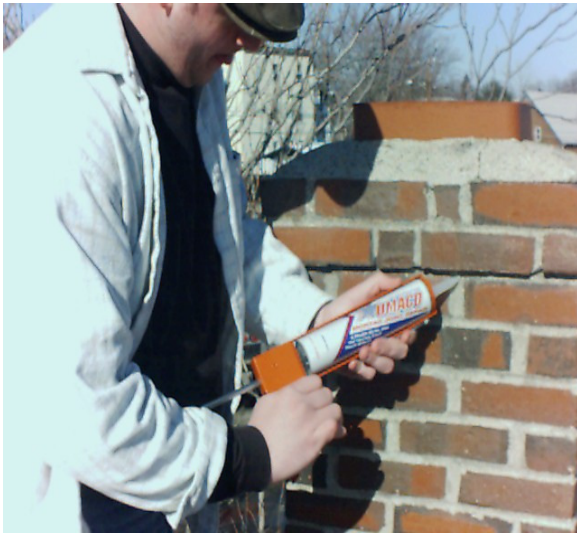

MORTAR JOINT REPAIR is a water based, siliconized acrylic sealant (caulk) designed to repair cracks in mortar joints, concrete or any other cementitious surface. **MORTAR JOINT REPAIR** bonds to most common building materials such as glass, mortar, aluminum, brick and wood.

- Long lasting, flexible, weather resistant protection
- Will withstand $\pm 12-1/2\%$ joint movement
- Tools easily
- Easy clean up
- Withstands rainfall after 8 hours at 70°F
- May be painted after it is dry to the touch, usually in less than one hour at 70°F
- Easy clean up
- Non structural mortar repair
- Interior and exterior use

Mortar Repair Sealant	Apply with standard caulk gun
Packaging	10 oz tube (12/case)
Coverage per 10 oz tube	24.1 linear feet at 1/4" bead
Application Temperature	40°F to 140°F
Elongation	116%
Tack Free	20 minutes to 1 hour at 70°F, 50% RH
Cure Rate	6 days at 70°F, 50% RH
Color	Gray cement like color and texture



Phone: 800-442-5535
 Fax: 978-453-2416
www.umaco.com