


# TITE-ROC

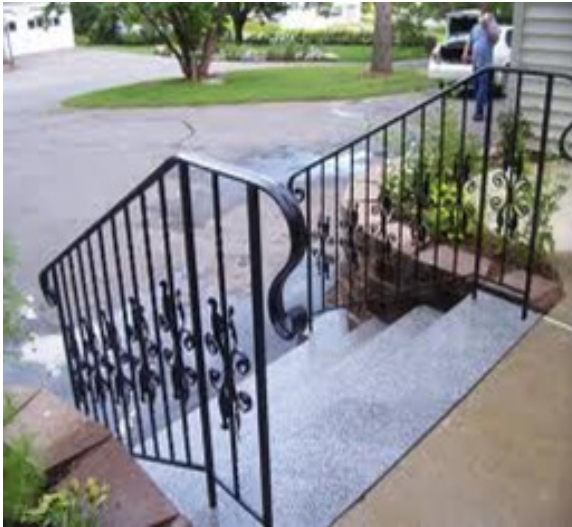

**TITE-ROC** is a fast setting, pourable, non shrink, hydraulic cement used for anchoring bolts, posts, railings and other fixtures in concrete and masonry surfaces.

**TITE-ROC** will not loosen, crack or shrink under stress, vibration or cold temperature.

- Easy to use, just add water and pour
- Fast setting
- Sets in 15 minutes & cures in one hour
- Non shrinking
- Expands as it sets
- Self-leveling
- Adheres to any object embedded in it
- Tenacious bond to concrete
- Sets stronger than concrete in 15 minutes
- Contains no corrosive agents

Anchoring Cement	May be poured or troweled
Packaging	40 lb pail (60/pallet) 6 lb pail (6/case)
Coverage	One lb yields 17 cubic inches
Application Temperature	Ambient & surface temperature must be 40°F or above and will not fall below that for 48 hours
Mixing	Just enough water to form a pourable consistency (horizontal)
Working Time	5 minutes at 70°F
Set Time	15 minutes at 70°F
Color	Gray



Phone: 800-442-5535  
Fax: 978-453-2416  
[www.umaco.com](http://www.umaco.com)